

# 1080P WIFI Camera

## Manual



APP: Camwf

Initial use, pull out the battery insulation sheet !!!


## Contents

## 目录

- 1: 1-9 English instructions (英文说明)
- 2: 10-16 Chinese Description (中文说明)

## Product schematic

### 产品示意图

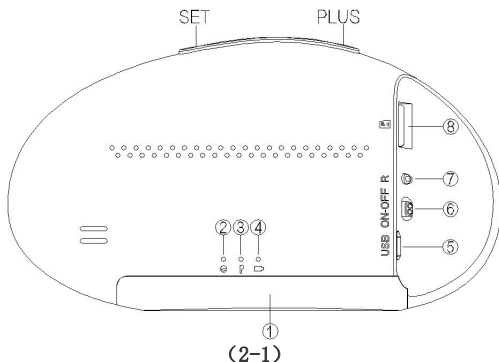

#### 》 : Illustrate ( 图解说明 )

① Battery ( 电池 ) ② Function lamp ③ Power Supply ( 电源 )

④ Charge ( 充电 ) ⑤ USB ⑥ ON-OFF ⑦ Restore ⑧ TF

#### 》 : Function Keys ( 功能键详细说明 )

- ⑦ Restore
- \* AP ( Press 2-3 seconds ) AP模式 ( 按2-3秒 )
  - \* Restore factory settings(Press 8 seconds) 恢复出厂设置 ( 按8秒 )
- ② Function lamp
- \* Instruction -AP (指示灯常亮-AP模式)
  - \* Indicator light flashes fast-WIFI ( 指示灯快速闪烁-WIFI模式)
  - \* Indicator light slow flash -Video status ( 指示灯慢闪烁-TF卡录像)

### (2-2)

## Instructions


### 1:Setting instruction of clock application SEE:(2-1)

#### 1.1: Function introduction

- ◇ Time display
- ◇ Press the key "PLUS" (switch of 12-hour to 24-hour)

#### 1.2: Function setting

- ◇Setting of current time


◇Press the key "SET" at the condition of time display"  " and enter the time setting, the screen shows twinkle at the hour position, press the key "PLUS" to set the hour.

Setting the hour



Setting the minute



◇Then press the key "SET" and enter the minute setting, the screen shows"  " twinkle at the minute position, press the key "PLUS" to set the minute.

- ◇Press the key "M" again to complete the time setting.
- ◇**For the first time, please charge. Do not remove the battery.**

### 2: Setting instruction of WIFI camera application

#### 2.1:Apply and download real time video surveillance mobile phone APP[ Camwf ] software

2.1.1: For mobile phones of IOS system, please search the English [ Camwf ] in APP Store and then download the APP software freely.

2.1.2: For mobile phones of Android system, please search the English [ Camwf ] in Play store of google, 360 mobile assistant, Android Market, Snap Pea, 91 assistants and Baidu applications, then download the APP software freely.

2.1.3: Default user name: admin Password: 888888

### 3: Phone connection AP


3.1 : See product schematic. ( 2-2 )

3.2 : WIFI camera boot , WIFI indicator flashes , Then the system will load the WiFi mode according to the last set of WiFi , Will follow the appropriate mode LED flashes , After waiting a long bright finished loading machine. You can open the phone open WIFI find (RT -\*\*\*\*\*) at the beginning of the WIFI connection , Open the phone APP [ Camwf ]. See product schematic. ( 14-1 )

3.3 : Restore the factory Settings

Restore factory settings, See product schematic. ( 2-2 ) 。 Please see the product schematic,The camera will automatically restart , And restore all settings to Factory state , Including passwords and WiFi mode (AP hot spot mode) , The default user name : **admin** Password: **888888**


3.4 : How to use APP. Select APP :Camwf




( 14-1 )




( 14-2 )

Select icon at the top right-hand corner "  " SEE : ( 14-3 )

Choose" LAN Search Devices " SEE : ( 14-4 )




( 14-3 )




( 14-4 )

Select the UID SEE : ( 14-5 ) Choose "OK" SEE : ( 14-6 )





( 14-5 )




( 14-6 )

Add complete camera SEE : ( 14-7 ) Choose "LAN Search Devices"

SEE : ( 14-4 ) Manually add SEE : ( 14-8 ) . "  " Refresh





( 14-7 )




( 14-8 )


## 4: How to set up WIFI

4.1: SEE :( 14-7 ) Select the Settings icon "  " window SEE :( 14-9 ) choose" Network Settings "




( 14-9 )

4.2 : SEE : ( 14-10 ) choose”  “ SEE : ( 14-11 ) Choose the WIFI click ok, Enter a password click ok. The pop-up window (14-7) .



( 14-10 )



( 14-11 )

4.3: Remember WIFI account and password are case sensitive.



After entering the correct password WIFI network lights flashing on the device description is looking for connection (WIFI) router , Connection prompt tone.

4.4: Your phone as long as there is internet (WIFI connection or 2G, 3G, 4G network) can be watched at any time in any place.




**5: Use a mobile phone APP video pictures . "🔄" Refresh**

**SEE : ( 14-12 ) ( 14-13 )**




( 14-12 )



( 14-13 )

**6: Set the video resolution,timing video, SD card video, please click "ok". restart . SEE : ( 14-14 ) .**



( 14-14 )

## 7: Indicator Description

7.1: See product schematic ( 2-2 )

7.2: LEDs function as follows:

7.2.1 : WiFi AP mode indicator

Said flash is being launched at startup hot spot mode WiFi AP , After a long bright LED start , Phone can directly search (RT-\*\*\*\*\*) via WiFi hot spots , Click on it to connect directly to the camera.

7.2.2 : STA routing mode indicator.

Said flash is being launched at startup STA routing mode , After a long bright LED start , Said that it has connected to the router , Then you can access the phone camera by routing , Including remote access.

## 8: Camera parameters

**Image Sensor** : HD1080P/30fps

**Audio** : F2.2 FOV: 160° :25cm Infinity

**Wireless** : IEEE802.11 b/g/n

**Wireless Mode** : AP/STA

**PC WIFI Video** : 1080P 1920x1080

**Mobile WIFI Video** : 1080P 1920x1080 , 720P 1280x720 , 640x480

**Storage Media** : Micro TF(64GB)

**Compression formats** : H.264 Dual-stream

**SD video** : Video Recording , Loop video recording,

Download Videos from Website

**Support** : IOS, Android APP XP,Win7 Please install the CD file